

REGUPOL AMERICA

ACOUSTICAL PERFORMANCE TEST REPORT

SCOPE OF WORK

ASTM E90 SOUND TRANSMISSION LOSS TESTING ON A
WOOD STUD WALL ASSEMBLY WITH SONUSCLIP™

REPORT NUMBER

H7676.02-113-11-R0

TEST DATE

11/21/17

ISSUE DATE

12/21/17

RECORD RETENTION END DATE

11/21/21

PAGES


11

DOCUMENT CONTROL NUMBER

ATI 00286 (07/24/17)

RT-R-AMER-Test-2758

© 2017 INTERTEK

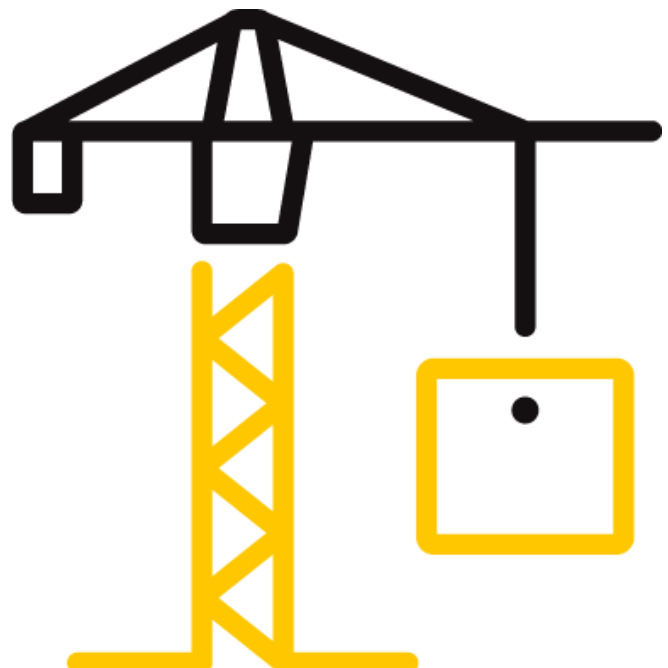

TEST REPORT FOR REGUPOL AMERICA

Report No.: H7676.02-113-11-R0

Date: 12/21/17

REPORT ISSUED TO

REGUPOL AMERICA

11 Ritter Way

Lebanon, Pennsylvania 17042

SECTION 1

SCOPE

Intertek Building & Construction (B&C) was contracted by Regupol America to conduct a sound transmission loss test. Results obtained are tested values and were secured by using the designated test method(s). The complete test data is included herein. The client provided the test specimen. All measurements were conducted in the HT test chambers at Intertek B&C located in York, Pennsylvania.

This report does not constitute certification of this product nor an opinion or endorsement by this laboratory.

SECTION 2

SUMMARY OF TEST RESULTS

DESCRIPTION	2x4 Wood stud 16" on center with one layer 5/8" USG Type C gypsum board direct mount receive side, R-13" fiberglass insulation, one layer 5/8" USG Type C gypsum board mounted to SONUSCLIP™ and hat channel source side
TYPE	Wood stud wall assembly
DATA FILE NO.	H7676.01B
STC	54
OITC	37

For INTERTEK B&C:

COMPLETED BY:	Zachary P. Golden
TITLE:	Technician I Acoustical Testing
SIGNATURE:	
DATE:	12/21/17

ZPG:jmc

REVIEWED BY:	Kurt A. Golden
TITLE:	Project Lead Acoustical Testing
SIGNATURE:	
DATE:	12/21/17

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample(s) tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.



TEST REPORT FOR REGUPOL AMERICA

Report No.: H7676.02-113-11-R0

Date: 12/21/17

SECTION 3

TEST METHODS

The specimens were evaluated in accordance with the:

ASTM E90-09 (2016), *Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements*

ASTM E413-16, *Classification for Rating Sound Insulation*

ASTM E1332-16, *Standard Classification for Rating Outdoor-Indoor Sound Attenuation*

ASTM E2235-04 (2012), *Standard Test Method for Determination of Decay Rates for Use in Sound Insulation Test Methods*

SECTION 4

SPECIMEN INSTALLATION

A sound transmission loss test was initially performed on a filler wall. The 96" wide by 96" high specimen plug was removed from the filler wall assembly. The specimen was constructed in the laboratory. The specimen was constructed on an isolation pad in the test opening. Duct seal was used to seal the perimeter of the specimen to the test opening on both sides. The interior side of the specimen, when installed, was approximately 1/4" from being flush with the receive room side of the filler wall. A stethoscope was used to check for any abnormal air leaks around the test specimen prior to testing.

TEST REPORT FOR REGUPOL AMERICA

Report No.: H7676.02-113-11-R0

Date: 12/21/17

SECTION 5 EQUIPMENT

The equipment listed below meets the requirements of the test methods stated in Section 3 of this report.

INSTRUMENT	MANUFACTURER	MODEL	DESCRIPTION	ASSET #	CAL DATE
Data Acquisition Card	National Instruments	PXI-4462	Data Acquisition Card	1643A62	04/16 *
Data Acquisition Card	National Instruments	PXI-4462	Data Acquisition Card	65126	05/16 *
Data Acquisition Card	National Instruments	PXI-4462	Data Acquisition Card	65125	05/16 *
Source Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	INT00652	12/16
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	64903	02/17
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	65103	02/17
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	64905	02/17
Source Room Microphone	PCB piezotronics	378C20	Microphone and Preamplifier	64906	02/17
Receive Room Microphone	PBC Piezotronics	378B20	Microphone and Preamplifier	64907	01/17
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	64908	01/17
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	64909	01/17
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	64910	01/17
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	64911	01/17
Receive Room Environmental Indicator	Comet	T7510	Receive Room	64915	03/17
Source Room Environmental Indicator	Comet	T7510	Source Room	64914	03/17
Microphone Calibrator	Norsonic	1251	Pistonphone Calibrator	Y002919	04/17

*- Note: The calibration frequency for this equipment is every two years per the manufacturer's recommendation.

TEST CHAMBER

	VOLUME	DESCRIPTION
RECEIVE ROOM	234 m ³	Rotating vane and stationary diffusers Temperature and humidity controlled Isolation pads under the floor
SOURCE ROOM	207 m ³	Stationary diffusers only Temperature and humidity controlled

	MAXIMUM SIZE	DESCRIPTION
TL TEST OPENING	4.27 m wide by 3.05 m high	Vibration break between source and receive rooms

TEST REPORT FOR REGUPOL AMERICA

Report No.: H7676.02-113-11-R0

Date: 12/21/17

SECTION 6**LIST OF OFFICIAL OBSERVERS**

NAME	COMPANY
Bill Devin	Regupol America
Zachary P. Golden	Intertek B&C
Daniel Poet	Intertek B&C
Jear Mutunda	Intertek B&C

SECTION 7**TEST PROCEDURE**

The sensitivity of the microphones was checked before measurements were conducted.

The transmission loss values were obtained for a single direction of measurement.

Two background noise sound pressure level and five sound absorption measurements were conducted at each of five microphone positions.

Two sound pressure level measurements were made simultaneously in receive and source rooms at each of five microphone positions.

The air temperature and relative humidity conditions were monitored and recorded during all measurements.

Data for flanking limit tests, repeatability measurements, and reference specimen tests are available upon request.

Intertek B&C will store samples of test specimens for four years.

TEST REPORT FOR REGUPOL AMERICA

Report No.: H7676.02-113-11-R0

Date: 12/21/17

SECTION 8

ACOUSTICAL TEST CALCULATIONS

Transmission loss (TL) at each 1/3 octave frequency is the average source room sound pressure level minus the average receive room sound pressure level, plus, 10 times the log of the specimen area divided by the sound absorption of the receive room with the sample in place.

STC Rating

To obtain the Sound Transmission Class (STC), read the TL of the contour curve at 500 Hz. The sum of the deficiencies below the contour curve must not exceed 32. The maximum deficiency at any one frequency must not exceed 8.

OITC Rating

The Outdoor-Indoor Transmission Class (OITC) is calculated by subtracting the logarithmic summation of the TL values from the logarithmic summation of the A-weighted transportation noise spectrum stated in ASTM E1332.

TEST REPORT FOR REGUPOL AMERICA

Report No.: H7676.02-113-11-R0

Date: 12/21/17

SECTION 9

SPECIMEN DESCRIPTION

GYPSUM BOARD	One layer 5/8" Type C
STUDS	2x4 Wood, 16" on center
INSULATION	R-13, Unfaced fiberglass insulation
PLATES	2x4 Wood
SONUSCLIP™	Regupol SONUSCLIP™
HAT CHANNEL	2-9/16" Steel (25 gauge)
GYPSUM BOARD	One layer 5/8" Type C

MATERIAL	ACTUAL DIMENSIONS (inches)	ACTUAL THICKNESS (inches)	MANUFACTURER AND SERIES	QUANTITY	AVERAGE WEIGHT
GYPSUM BOARD	48 by 96	0.625	USG Fire Core Type C	2 sheets	2.5 lbs/ft ²
	Note: Screws spaced on 12" centers. Perimeter was sealed with duct seal. Screw heads were sealed with foil tape, joint sealed with acoustical sealant and foil tape				
STUD	1-1/2 by 93	3.5	Wood	7 pieces	0.93 lbs/linear ft
	Note: 16" centers. Screwed to top and bottom plates.				
INSULATION	15-1/4 by 95-1/2	3.5	R-13 Unfaced fiberglass Insulation	6 batts	0.31 lbs/ft ²
	Note: Cavity between gypsum boards.				
PLATE	1-1/2 by 96	3.5	Wood	2 pieces	0.93 lbs/linear ft
	Note: Screwed to top and bottom frame.				
SONUSCLIP™	1-3/8 by 3	1-1/16	Regupol SONUSCLIP™	22 clips	0.130 lbs per clip
	Note: Screwed to studs 24" by 48" grid pattern per manufacturer's specifications.				
HAT CHANNEL	95-1/2 by 2-9/16	7/8	Steel, 25 Gauge equivalent	5 pieces	0.245 lbs/linear ft
	Note: Clipped on to SONUSCLIPS and spaced every 24"				
GYPSUM BOARD	48 by 96	0.625	USG Fire Core Type C	2 sheets	2.5 lbs/ft ²
	Note: Screws spaced on 12" centers. Perimeter was sealed with duct seal. Screw heads were sealed with foil tape, joint sealed with acoustical sealant and foil tape				

TOTAL WEIGHT (lbs)	AVERAGE WEIGHT (lbs/ft ²)
412	6.44

The client did not supply a report drawing of the test specimen.

TEST REPORT FOR REGUPOL AMERICA

Report No.: H7676.02-113-11-R0

Date: 12/21/17

SECTION 10

TEST RESULTS

SPECIMEN AREA	5.95 m ²	RECEIVE TEMP.	21.7 °C	SOURCE TEMP	21.6 °C
TECHNICIAN	Zachary Gol	RECEIVE HUMIDITY	47%	SOURCE HUMIDITY	47%

FREQ (Hz)	BACKGROUND SPL (dB)	ABSORPTION (m ²)	SOURCE SPL (dB)	RECEIVE SPL (dB)	SPECIMEN TL (dB)	95% CONFIDENCE LIMIT	NUMBER OF DEFICIENCIES
80	39.0	5.7	106	85	21	1.43	-
100	32.0	5.8	106	83	23	2.22	-
125	34.7	5.3	106	75	31	1.73	7
160	39.6	4.5	106	72	35	0.72	6
200	37.0	4.7	107	68	40	0.78	4
250	29.0	5.2	107	64	44	0.87	3
315	23.1	5.4	100	53	47	0.52	3
400	20.8	5.8	98	47	52	0.58	1
500	17.1	5.9	98	46	53	0.54	1
630	17.0	5.7	102	45	57	0.43	0
800	15.1	6.0	101	41	61	0.39	0
1000	10.7	6.2	98	35	63	0.30	0
1250	7.8	6.7	99	33	66	0.22	0
1600	5.4	7.2	102	41	61	0.32	0
2000	4.4	7.8	96	41	54	0.31	4
2500	4.6	8.8	95	36	57	0.31	1
3150	4.6	10.5	98	33	62	0.31	0
4000	5.3	12.9	96	25	67	0.37	0
5000	6.1	16.7	95	18	73	0.42	-
STC RATING	54 (Sound Transmission Class)						
DEFICIENCIES	30 (Sum of Deficiencies)						
OITC RATING	37 (Outdoor-Indoor Transmission Class)						

Notes:

- 1) Receive Room levels less than 5 dB above the Background levels are red.
- 2) Specimen TL levels listed in red indicate the lower limit of the transmission loss.
- 3) Specimen TL levels listed in green indicate that there has been a filler wall correction applied


TEST REPORT FOR REGUPOL AMERICA

Report No.: H7676.02-113-11-R0

Date: 12/21/17

SECTION 11

RESULTS GRAPH

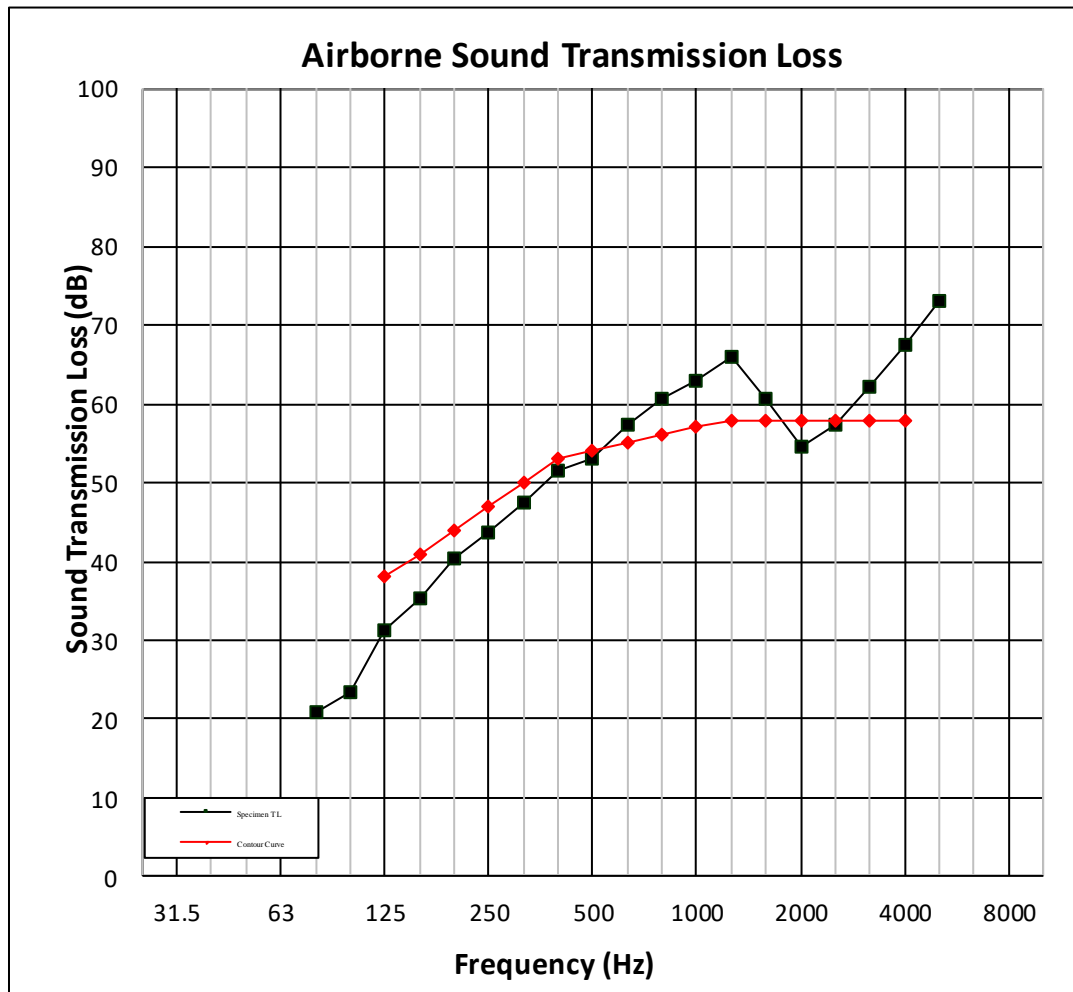

TEST REPORT FOR REGUPOL AMERICA

Report No.: H7676.02-113-11-R0

Date: 12/21/17

SECTION 12

PHOTOGRAPHS



Photo No. 1
Receive Room View of Installed Test Specimen



Photo No. 2
Source Room View of Installed Test Specimen



Total Quality. Assured.

130 Derry Court
York, Pennsylvania 17406

Telephone: 717-764-7700
Facsimile: 717-764-4129
www.intertek.com/building

TEST REPORT FOR REGUPOL AMERICA

Report No.: H7676.02-113-11-R0

Date: 12/21/17

SECTION 13

REVISION LOG

REVISION #	DATE	PAGES	REVISION
0	12/21/17	N/A	Original Report Issue