

INSTALLATION GUIDELINE **REGUPOL INODIS**



INSTALLATION GUIDELINE

REGUPOL INODIS



PREPARATION



Smooth and levelling...



... Clean and free of dust surface.

STEP 1: COLUMNS



Mark the position for middle strip at columns.



Glue the middle strip **REGUPOL INODIS vertical**.



Loosely attach the outer strip **REGUPOL INODIS vertical**.



Fix the **REGUPOL INODIS vertical** with a tape.

INSTALLATION GUIDELINE

REGUPOL INODIS



STEP 2: BOTTOM/TOP



Apply thin layer mortar to the fleece of the middle strip **REGUPOL INODIS horizontal** ...



... and place the strip to the concrete bottom beam (silver side upwards).



Place the sliding profiles on the middle strip **REGUPOL INODIS horizontal**.



Place the outer strips **REGUPOL INODIS horizontal** on the sliding profile with fleece facing upwards.



Apply thin layer mortar to the fleece of the middle strip **REGUPOL INODIS horizontal** and place the strip to the concrete surface at the top (silver side downwards).



Instead of using mortar, **REGUPOL INODIS horizontal** can be attached to the concrete by nailing or screwing.

INSTALLATION GUIDELINE

REGUPOL INODIS



STEP 3: BRICK UP




Apply thin layer mortar on the outer strip **REGUPOL INODIS vertical** and **REGUPOL INODIS horizontal**.




Place the corner brick in the corner and press it into the mortar layer to ensure a proper bonding.



Place brick by brick on the **REGUPOL INODIS horizontal** and continue brick-up to the last row using an approved standard or thin-layer mortar.

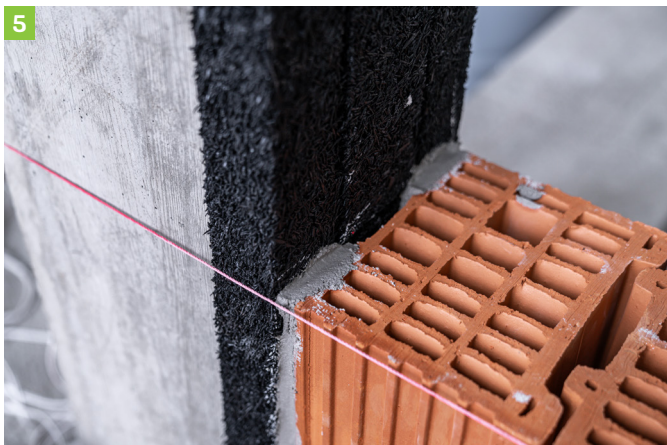

Step by step installation of **REGUPOL INODIS vertical** according to STEP 1 and brick up.

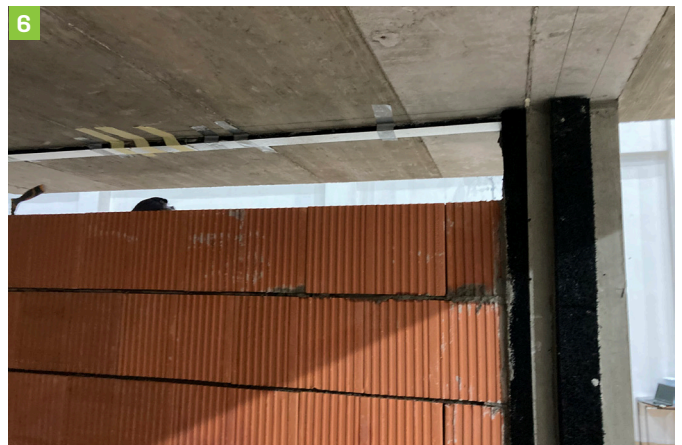

INSTALLATION GUIDELINE

REGUPOL INODIS



STEP 4: TOP




Measure the gap height (brick to concrete) and cut the bricks leaving a gap of approx. 2 cm.



Insert the sliding profiles between the top row of bricks and middle strip **REGUPOL INODIS horizontal**.



Apply thin layer mortar to the fleece of the outer strip **REGUPOL INODIS horizontal** and insert them with the mortar side towards the bricks.

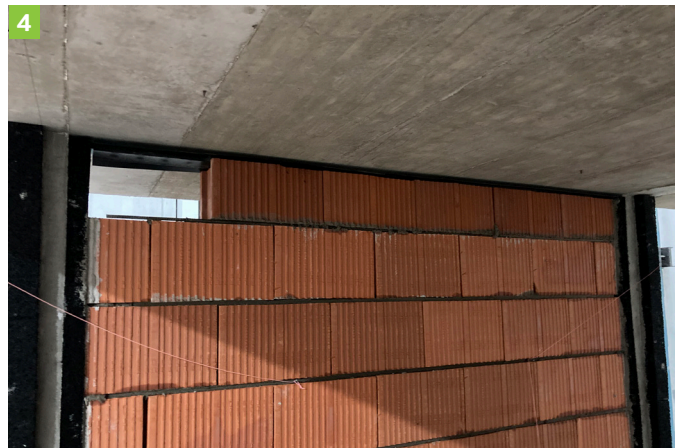

Completion of the last row with sliding surfaces and outer strips of **REGUPOL INODIS horizontal**.



REGUPOL INODIS decoupled infill wall. The wall can easily be plastered with joint tapes (mesh fibreglass) covering the rubber joints. Alternatively, wallboards can be applied.

Contact

If you have any questions or queries, please do not hesitate to contact us.

+49 2751 803-0

acoustics@regupol.eu

REGUPOL INODIS

A SIMPLE AND SAFE SOLUTION



[illegible]



REGUPOL Germany GmbH & Co. KG

Am Hilgenacker 24
57319 Bad Berleburg
Tel.: +49 (0)2751 803-0
info@regupol.de

REGUPOL America LLC

REGUPOL Australia Pty. Ltd.

REGUPOL Acoustics Middle East FZE

REGUPOL Schweiz AG

REGUPOL Zebra Athletics LLC

BSW Shanghai CO. LTD.

www.regupol.com