

# TECHNICAL DATA

## REGUPOL SONUS CURVE 6



### Product

Sustainable impact and airborne sound insulating underlayment for various floor structures under screed beds and floating floors.

### Material

- PUR-bonded recycled rubber fibres
- Dimpled profile on the underside

### Weight

70.0 kg/roll – 3.5 kg/m<sup>2</sup>

### Dimensions

Length: 18,000 mm, Width: 1,250 mm, Thickness: 6 mm


### Applications

Under cement or gypsum screed beds, concrete or timber toppings and other floating floor solutions for both residential and commercial use.

### Certification

GreenCircle certified for recycled content and can potentially qualify for up to 8 LEED points.

**Cradle to Cradle Certified®** is a registered trademark of the Cradle to Cradle Products Innovation Institute.



REGUPOL sonus curve 6 is Cradle to Cradle Certified® at the Bronze level.

Acoustical Performance*	Standard	Result
Under cement screed:		
40 mm cement screed, <b>REGUPOL sonus curve 6</b> , 100 mm concrete slab	ISO 10140-3 ISO 717-2	$\Delta L_w \geq 18$ dB
Under ceramic tiles:		
8 mm ceramic tiles 30 mm bonded screed, <b>REGUPOL sonus curve 6</b> , 150 mm concrete slab	ISO 10140-3 ISO 717-2 ASTM E492-09 ASTM E989-06	$L_{n,w} = 52$ dB $\Delta L_w = 24$ dB IIC 57
Under engineered timber:		
14 mm engineered timber (floating) <b>REGUPOL sonus curve 6</b> , 150 mm concrete slab	ISO 10140-3 ISO 717-2 ASTM E492-09 ASTM E989-06	$L_{n,w} = 58$ dB $\Delta L_w = 17$ dB IIC 51
13 mm engineered timber (floating) <b>REGUPOL sonus curve 6</b> , 152 mm concrete slab with suspended ceiling	ASTM E492-09 ASTM E989-06	IIC 68

\*Assembly from top to bottom

# TECHNICAL DATA

## REGUPOL SONUS CURVE 6




Material properties	Standard	Result
Maximum surface load		50 kN/m <sup>2</sup>
Mean dynamic stiffness value	DIN EN 29052-1	$s'_t \leq 45 \text{ MN/m}^3$
Compressibility	DIN EN 12431	$c \leq 1 \text{ mm}$

Thermal behaviour	Standard	Result
Thermal conductivity	DIN EN 12667	$\lambda = 0.075 \text{ W/(mK)}$
Thermal resistance	DIN EN 12667	$R = 0.06 \text{ (m}^2\text{K)/W}$
Temperature resistance		-20 to +60° C

Fire behaviour	Standard	Result
Fire classification	DIN EN 13501-1	E

Health protection	Standard	Result
VOC	DIN EN 16516	compliant with EU-LCI list and German AgBB scheme; "A+" as per décret n°2011-321
Nitrosamine	DIK Method	compliant with German Model Building Regulation
PAH	DIN EN 18287	compliant with German Model Building Regulation

### Physical data - Deflection

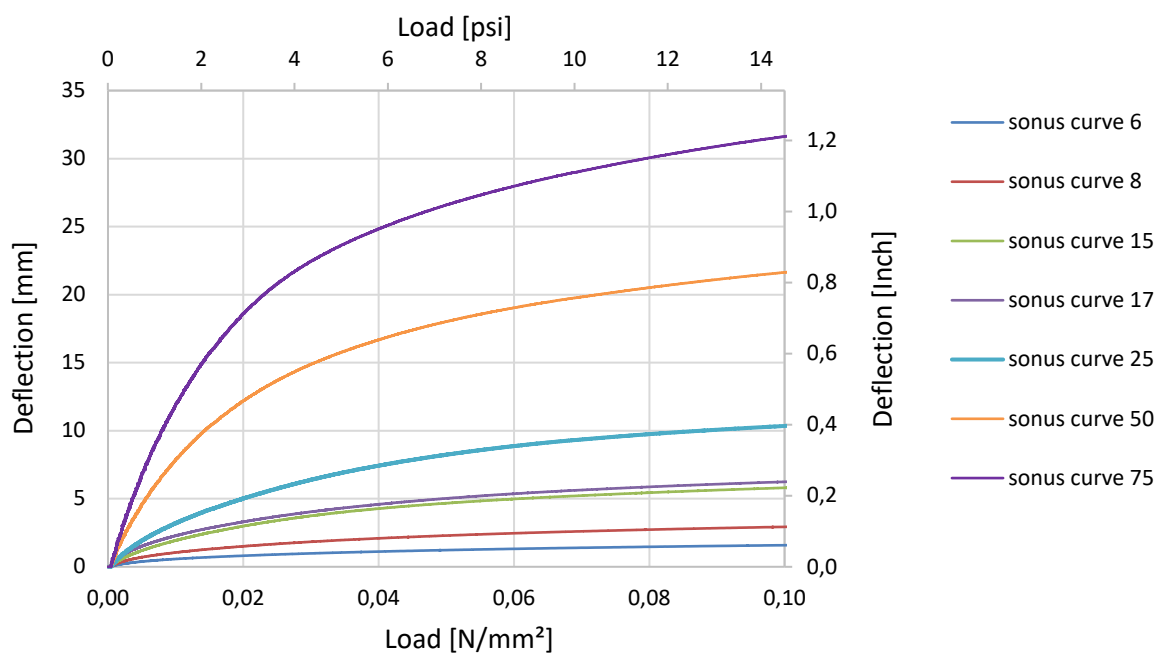


Test results as per test report 07-2019 conducted by Technical University of Dresden, Germany

# TECHNICAL DATA

## REGUPOL SONUS CURVE 6




### Physical data – Natural frequency

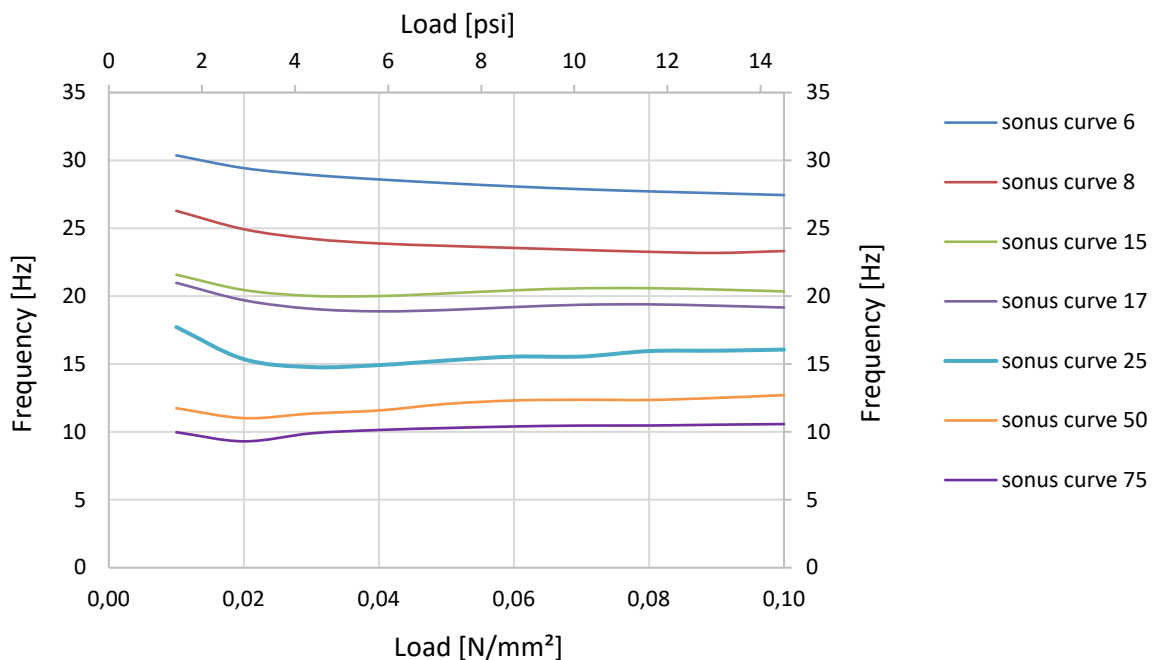

Test results as per test report 07-2019 conducted by Technical University of Dresden, Germany

### Floor Assembly

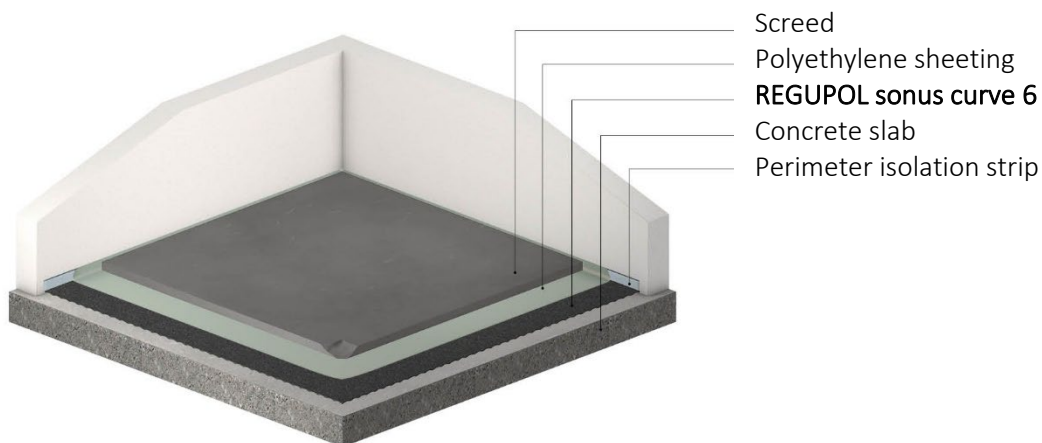

For more assemblies and acoustic test reports, please visit [www.regupol.com](http://www.regupol.com).