## REGUPOL sonus core 2 FORMERLY HS200



# Applications: REGUPOL sonus core is a high performance acoustical underlayme

- Apartments
- Condominiums
- College dormitories
- Classrooms
- Hospitals
- Office buildings
- Any area where noise reduction is desired.

**REGUPOL sonus core** is a high performance acoustical underlayment designed to reduce the transmission of noise created by people walking. **Sonus core** can be installed under ceramic tile & stone, carpet & carpet tile, and hardwood flooring.

#### **Materials**

**REGUPOL sonus** underlayment's are made from recycled car and truck tires and are GreenCircle certified for recycled content and can qualify for up to 8 LEED points. **REGUPOL** is the preferred choice for noise control applications and sustainable design.

#### **REGUPOL SONUS CORE 2 – 2MM UNDERLAYMENT SPEC'S**


Standard Roll Dimensions:	4' x 75' – 300 sqft / roll
Weight:	0.40 lbs / sqft

#### **PRODUCT PERFORMANCE**

Density:	ASTM D-792	61 lb / cuft (+/- 4 lb)
Hardness:	A Shore Durometer	40 - 55
Uses:	Installation under carpet, tile, stone, hardwood, and laminate flooring	

Please contact us for detailed testing information and product data.

#### acoustics@regupol.com www.regupol.com/acoustics

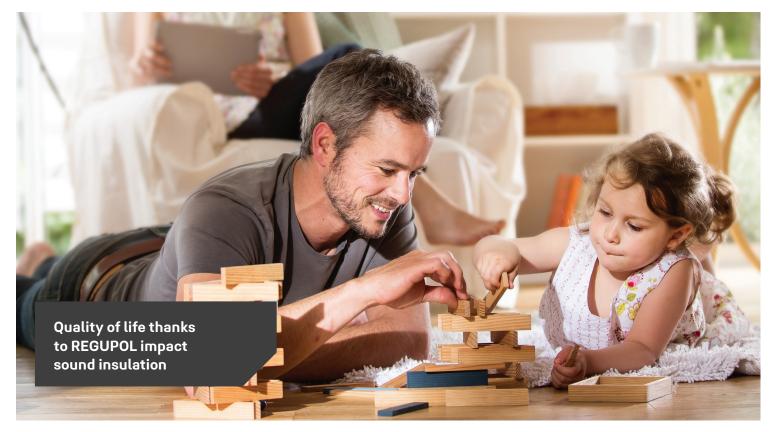



#### ACOUSTICS / REGUPOL® SONUS CORE 2 (FORMERLY HS200)

Floor Covering	Floor-Ceiling Assembly	IIC/STC/ΔIIC
Laminate Flooring (1/4")	6" slab, <b>sonus core 2</b>	IIC 53 ΔIIC 24

\*additional acoustic tests available at regupol.com/acoustics or call us 717 675 2190


REGUPOL 40-205 (formerly WoodBond)	<b>REGUPOL 40-205</b> is a one component polyurethane adhesive ideal for bonding <b>sonus core</b> underlayment for engineered hardwood.
4 gal pail	See product data sheet for coverage estimation
REGUPOL 45-101 (formerly TruBond)	<b>REGUPOL 45-101</b> is a component latex adhesive ideal for bonding <b>sonus core</b> to the subfloor. Note: <b>REGUPOL 45-101</b> is only to be used to adhere the <b>sonus core</b> for ceramic tile installations
4 gal pail	400-650 sqft of coverage based upon subfloor
REGUPOL ISO-Strips	<b>REGUPOL ISO-Strips</b> can be installed on perimeter walls or under wall partitions to reduce noise transmission.
Dimensions:	Thickness: 1/4" (6mm), Length: 5' (1,524mm), Widths: 4", 6", 8" (102mm, 152mm, 203mm)

#### acoustics@regupol.com www.regupol.com/acoustics

### Our tip:

Ask us about the system components – such as adhesives and primers – suitable for each individual **REGUPOL** product. Our experts are glad to support you.

#### **REGUPOL** sonus core







#### REGUPOL 45-101

**REGUPOL** iso-strip





REGUPOL AMERICA | Sonus US RAAP-2021.02.0015V4 REGUPOL is a registered trademark of BSW

©2021 REGUPOL America LLC | 11 Ritter Way Lebanon, PA 17042 regupol.com | 1.800.537.8737